


1.View and size(视图及尺寸)

Main technical indicators(主要技术指标)	
1.Mating (插拔次数)	5000
2.Working Temperature (温度)	-55~+150 ℃
3.IP Rating (防护级别)	IP 50
4.Diameter of socket end(插合端直径)	$\frac{22.9}{0.13}$ MM
5.Vtest (AC) /测试电压(交流)	$\frac{1500}{1500}$ V
6.Vtest (DC) /测试电压(直流)	$\frac{2100}{2100}$ V
7.Rated Current (额定电流)	$\frac{18}{14}$ A
8.Shell material(壳体材质)	Brass (chrome plated) shell and collet nut, nickel plated brass latch sleeve and mid pieces /黄铜 (镀铬)外壳和夹头螺母, 镀镍黄铜锁套和中间件
9.Pin Material(插针材料)	Copper alloy gold plating(铜合金镀金)
10.Insulator material(绝缘体材质)	PPS


Sum up(总结)	
Series(系列)	S
Shell style/model (外壳样式/型号)	MCA: Free receptacle, cable collet /自式插座, 电缆夹头
Button (按键)	Hermaphroditic keying (half moon insert) with female pin 1/雌雄同体键控 (半月形插入), 带母销1
Termination type (终止类型)	Mother solder tin(母焊锡)
Line diameter awg(线材直径)	0AWG-20AWG
Cable diameter ϕ (电缆直径)	ϕ 8.3-9.2MM
Matching parts(配套零件)	TFA.3S.P05.CLAC.92

Sum up(总结)	
Humidity (max)/湿度最大	<=95% [at 60 deg C /140 F] /<=95%[在60摄氏度/140摄氏度时]
Vibration/震动	15g [10 Hz - 2000 Hz]
Shock Resistance/抗冲击性	100 g [6 ms]
Climatical Category /气候类别	50/175/21
Salt Spray Corrosion/盐雾测试	>48 hr/>48小时

	A	B	C√	ANGLE	
5-10	±0.02	±0.05	±0.1	0°-30°	±0.1°
50-100	±0.1	±0.15	±0.2	61°-90°	±0.5°
50-100	±0.15	±0.2	±0.25		
100-	±0.15%	±0.20%	±0.25%		

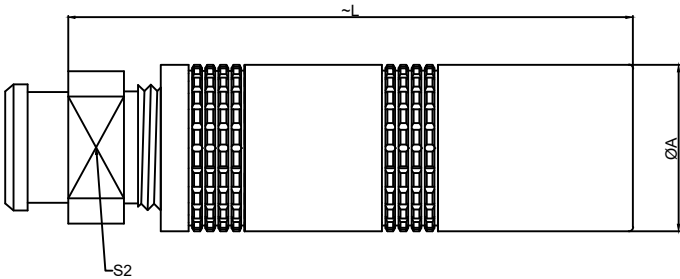

	A	L	S2
MM	17.8	59	14
in	0.7	2.32	0.55

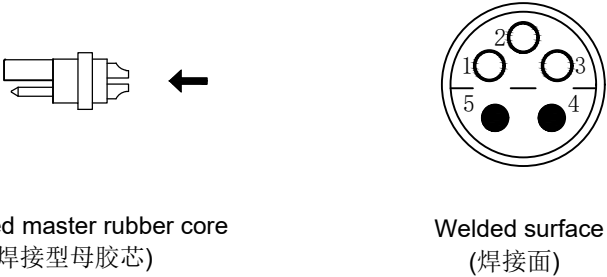

MCA. 3S. P05.C L L C 92 H

Model(型号)	MCA. 3S. P05.C L L C 92 H
Series(系列)	
Needle core configuration(针芯配置)	
Outer casing(外壳)	
Insulator(绝缘体)	
Needle core(针芯)	
Type of clamp(线夹类型)	
Cable diameter(电缆直径)	
SH means a sheath type, not a cover type. (H表示护套型, 不表示为不带护套型)	

DESIGNED(设计)		DATE(日期)		SCALE(比额)	N/A(不适用)	MODEL TYPE 型号类型: MCA.3S.P05.CLLC.92H
CHECKED(校对)		DATE(日期)		VIEW(视图)		PART NO. 3S5-core socket 名称: 3S5芯插座
APPROVED(审核)		DATE(日期)		UNIT(单位)	MM	DWG NO.:
REVISIONS				MATERIAL (材料)		
www.helloxkb.com www.helloxkb.cn			XKB INDUSTRIAL PRECISION CO.,LIMITED			WEIGHT(重量) SHEET(表) REVISION(修订) 1/1 A0