

Main technical indicators(主要技术指标)	
1.Mating (插拔次数)	5000
2.Working Temperature (温度)	-55~+150 ℃
3.IP Rating (防护级别)	IP 54
4.Diameter of socket end(插合端直径)	ø0.7
5.Testing Voltage (测试电压)	1250V
6.Working Voltage (工作电压)	1350V
7.Rated Current (额定电流)	7A
8.Shell material(壳体材质)	Brass (chromium plating) shell and chuck nut/(nickel plating) pin sleeve and middleware/黄铜（镀铬）外壳和夹头螺母/（镀镍）插销套和中间件
9.Pin Material(插针材料)	Copper alloy gold plating(铜合金镀金)
10.Insulator material(绝缘体材质)	PPS

Sum up(总结)					
Series(系列)	B				
Shell style/model（外壳样式/型号）	TEG: Straight plug, cable collet, front seal and nut for fitting a bend relief (IP 54 when mated) 直塞、电缆夹头、前密封件和用于安装弯曲凸起（配对时IP54）				
Button（按键）	A button(一个按键)				
Termination type（终止类型）	Male solder(公焊锡)				
Line diameter awg(线材直径)	30~22AWG				
Cable diameterø（电缆直径）	ø4.3-5.2MM				
Matching parts(配件)	ZGG.2B.P12.CLL				

Location pin combination (定位销组合)					
(编号) Numder	Number of positioning pins(定位销数量)	Angle(角度)	Series(系列)-2B		
G	One(1)		(Zero degrees)0°		
A	Two(2)	A	Thirty degrees(30°)		
B	Two(2)		Forty-five degrees(45°)		
C	Two(2)		Sixty degrees(60°)		
D	Two(2)	γ	95 degrees (95°)		
E	Two(2)	β	120 degrees(120°)		
F	Two(2)		145 degrees(145°)		
J	Two(2)	A	37.5degrees(37.5°)		
K	Two(2)		52.5degrees(52.5°)		
L	Two(2)	γ	Seventy degrees(70°)		

	A	B	C√	ANGLE	
5-10	±0.02	±0.05	±0.1	0°-30°	±0.1°
50-100	±0.1	±0.15	±0.2	61°-90°	±0.5°
50-100	±0.15	±0.2	±0.25		
100-	±0.15%	±0.20%	±0.25%		

	A	L	M	S1	S2
MM	ø16.5	48	36	13.0	12
in	0.6496	1.8898	1.4173	0.512	0.4725

Welded surface
(焊接面)

Positive view
(正视图)


Solder core
(焊接型公胶芯)

TE G. 2B. P12.C L A D 52 H

Model(型号)
Positioning pin(定位销)
Series(系列)
Needle core configuration(针芯配置)
Outer casing(外壳)
Insulator(绝缘体)
Needle core(针芯)
Type of clamp(线夹类型)
Cable diameter(电缆直径)

SH means a sheath type, not a cover type.
(H表示护套型，不表示为不带护套型))


DESIGNED (设计)	DATE(日期)	SCALE(比例)	N/A(不适用)	MODEL TYPE 型号类型: TEG.2B.P12.CLAD.52H
CHECKED (校对)	DATE(日期)	VIEW(视图)		PART NO. 2B12-core plug 名称: 2B12芯插头
APPROVED (审核)	DATE(日期)	UNIT(单位)	MM	DWG NO.:
REVISIONS		MATERIAL (材料)		
www.helloxkb.com www.helloxkb.cn		XKB INDUSTRIAL PRECISION CO.,LIMITED		WEIGHT(重量) SHEET(表) REVISION(修订)

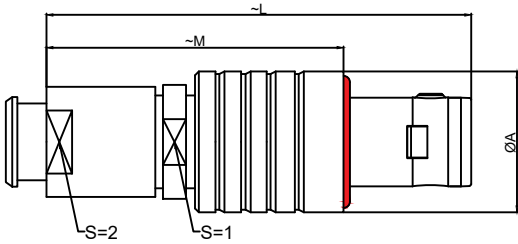


	A	L	M	S1	S2
MM	ø16.5	48	36	13.0	12
in	0.6496	1.8898	1.4173	0.512	0.4725



Welded surface
(焊接面)



Solder core
(焊接型公胶芯)



Positive view
(正视图)

TE G. 2B. P12.C L A D 52 H

- Model(型号)
- Positioning pin(定位销)
- Series(系列)
- Needle core configuration(针芯配置)
- Outer casing(外壳)
- Insulator(绝缘体)
- Needle core(针芯)
- Type of clamp(线夹类型)
- Cable diameter(电缆直径)
- SH means a sheath type, not a cover type.
(H表示护套型，不表示为不带护套型))