


| Main technical indicators(主要技术指标) |                                                                                                                       |
|-----------------------------------|-----------------------------------------------------------------------------------------------------------------------|
| 1.Mating (插拔次数)                   | 5000                                                                                                                  |
| 2.Working Temperature (温度)        | -55~+150 ℃                                                                                                            |
| 3.IP Rating (防护级别)                | IP 54                                                                                                                 |
| 4.Diameter of socket end(插合端直径)   | ø1.3                                                                                                                  |
| 5.Testing Voltage (测试电压)          | 1250V                                                                                                                 |
| 6.Working Voltage (工作电压)          | 900V                                                                                                                  |
| 7.Rated Current (额定电流)            | 12A                                                                                                                   |
| 8.Shell material(壳体材质)            | Brass (chromium plating) shell and chuck nut/( nickel plating) pin sleeve and middleware/黄铜 (镀铬) 外壳和夹头螺母/ (镀镍)插销套和中间件 |
| 9.Pin Material(插针材料)              | Copper alloy gold plating(铜合金镀金)                                                                                      |
| 10.Insulator material(绝缘体材质)      | PPS                                                                                                                   |


| Sum up(总结)                  |                                                                                                                                      |
|-----------------------------|--------------------------------------------------------------------------------------------------------------------------------------|
| Series(系列)                  | B                                                                                                                                    |
| Shell style/model (外壳样式/型号) | TEG: Straight plug, cable collet, front seal and nut for fitting a bend relief (IP 54 when mated)<br>直塞、电缆夹头、前密封件和用于安装弯曲凸起 (配对时IP54) |
| Button (按键)                 | A button(一个按键)                                                                                                                       |
| Termination type (终止类型)     | Male solder(公焊锡)                                                                                                                     |
| Line diameter awg(线材直径)     | 28-20AWG                                                                                                                             |
| Cable diameterø (电缆直径)      | ø9.3-10MM                                                                                                                            |
| Matching parts(配件)          | ZGG.3B.P10.CLL                                                                                                                       |

| Location pin combination (定位销组合) |                                          |               |                         |
|----------------------------------|------------------------------------------|---------------|-------------------------|
| (编号)<br>Nunder                   | Number of<br>positioning pins(定<br>位销数量) | Angle(<br>角度) | Series(系列)--3B          |
| G                                | One(1)                                   |               | (Zero degrees)0°        |
| A                                | Two(2)                                   | A             | Thirty degrees(30°)     |
| B                                | Two(2)                                   |               | Forty-five degrees(45°) |
| C                                | Two(2)                                   |               | Sixty degrees(60°)      |
| D                                | Two(2)                                   | γ             | 95 degrees (95°)        |
| E                                | Two(2)                                   | β             | 120 degrees(120°)       |
| F                                | Two(2)                                   |               | 145 degrees(145°)       |
| J                                | Two(2)                                   | A             | 37.5degrees(37.5°)      |
| K                                | Two(2)                                   |               | 52.5degrees(52.5°)      |
| L                                | Two(2)                                   | γ             | Seventy degrees(70°)    |


|        | A      | B      | C√     | ANGLE   |       |
|--------|--------|--------|--------|---------|-------|
| 5-10   | ±0.02  | ±0.05  | ±0.1   | 0°-30°  | ±0.1° |
| 50-100 | ±0.1   | ±0.15  | ±0.2   | 61°-90° | ±0.5° |
| 50-100 | ±0.15  | ±0.2   | ±0.25  |         |       |
| 100-   | ±0.15% | ±0.20% | ±0.25% |         |       |

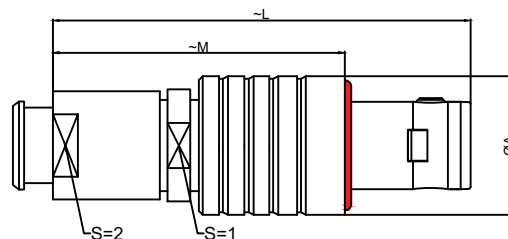

|    | A     | L      | M      | S1     | S2     |
|----|-------|--------|--------|--------|--------|
| MM | ø19   | 56.5   | 41.5   | 15.0   | 15     |
| in | 0.748 | 2.2244 | 1.6339 | 0.5906 | 0.5906 |



Welded surface  
(焊接面)



Positive view  
(正视图)



Solder core  
(焊接型公胶芯)

TE G. 3B. P10.C L A D 10 H

Model(型号)

Positioning pin(定位销)

Series(系列)

Needle core configuration(针芯配置)

Outer casing(外壳)

Insulator(绝缘体)

Needle core(针芯)

Type of clamp(线夹类型)

Cable diameter(电缆直径)

SH means a sheath type, not a cover type.  
(H表示护套型，不表示为不带护套型)

|                                  |  |          |  |                                      |          |                                         |
|----------------------------------|--|----------|--|--------------------------------------|----------|-----------------------------------------|
| DESIGNED(设计)                     |  | DATE(日期) |  | SCALE(比例)                            | N/A(不适用) | MODEL TYPE<br>型号类型: TEG.3B.P10.CLAD.10H |
| CHECKED(校对)                      |  | DATE(日期) |  | VIEW(视图)                             |          | PART NO. 3B10-core plug<br>名称: 3B10芯插头  |
| APPROVED(审核)                     |  | DATE(日期) |  | UNIT(单位)                             | MM       | DWG NO.:                                |
| REVISIONS                        |  |          |  | MATERIAL (材料)                        |          |                                         |
| www.helloxkb.com www.helloxkb.cn |  |          |  | XKB INDUSTRIAL PRECISION CO.,LIMITED |          | WEIGHT(重量) SHEET(表) REVISION(修订)        |
|                                  |  |          |  |                                      |          | 1/1 A0                                  |