

1.View and size(视图及尺寸)

Main technical indicators(主要技术指标)


1.Mating (插拔次数)	5000
2.Working Temperature (温度)	-55~+150 ℃
3.IP Rating (防护级别)	IP 50
4.Diameter of socket end(插合端直径)	φ0.7
5.Testing Voltage (测试电压)	1000V
6.Working Voltage (工作电压)	700V
7.Rated Current (额定电流)	6.5A
8.Shell material(壳体材质)	Brass (chromium plating) shell and chuck nut/(nickel plating) pin sleeve and middleware/ 黄铜 (镀铬) 外壳和夹头螺母/ (镀镍) 插销套和中间件
9.Pin Material(插针材料)	Copper alloy gold plating(铜合金镀金)
10.Insulator material(绝缘体材质)	PPS

Sum up(总结)

Series(系列)	B
Shell style/model (外壳样式/型号)	TGG: Straight plug, cable collet and nut for fitting a bend relief直塞、电缆夹头和螺母, 用于安装弯曲凸起
Button (按键)	A button(一个按键)
Termination type (终止类型)	Male solder(公焊锡)
Line diameter awg(线材直径)	30AWG-22AWG
Cable diameterφ (电缆直径)	φ2.3-3.2MM
Matching parts(配件)	ZGG.0B.P05.CLL

Location pin combination (定位销组合)

(编号) Number	Number of positioning pins(定 位销数量)	Angle(角度)	Series(系列)-0B	
G	One(1)		(Zero degrees)0°	
A	Two(2)	A	Thirty degrees(30°)	
B	Two(2)		Sixty degrees(60°)	
C	Two(2)		Ninety degrees(90°)	
D	Two(2)	β	135 degrees(135°)	
E	Two(2)		145 degrees(145°)	
F	Two(2)		155 degrees(155°)	
J	Two(2)	γ	Forty-five degrees(45°)	
K	Two(2)		Seventy degrees(70°)	
L	Two(2)		80 degrees(80°)	
	A	B	C√	ANGLE
5-10	±0.02	±0.05	±0.1	0°-30° ±0.1°
50-100	±0.1	±0.15	±0.2	61°-90° ±0.5°
50-100	±0.15	±0.2	±0.25	
100-	±0.15%	±0.20%	±0.25%	

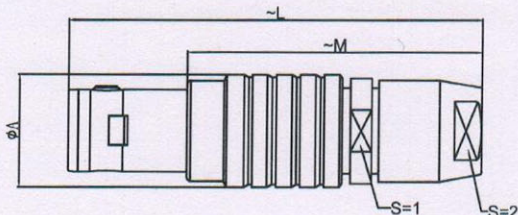


	A	L	M	S1	S2
MM	φ9.5	36	26	8.0	7
in	0.374	1.4173	1.0236	0.315	0.2756



Welded surface
(焊接面)



Solder core
(焊接型公胶芯)



Positive view
(正视图)

TG G. 0B. P05.C L A D 32

Model(型号)

Positioning pin(定位销)

Series(系列)

Needle core configuration(针芯配置)

Outer casing(外壳)

Insulator(绝缘体)

Needle core(针芯)

Type of clamp(线夹类型)

Cable diameter(电缆直径)

DESIGNED(设计)	DATE(日期)	SCALE(比例)	N/A(不适用)	MODEL TYPE 型号类型: TGG.0B.P05.CLAD.32
CHECKED(校对)	DATE(日期)	VIEW(视图)		PART NO. 0B5-core plug 名称: 0B5芯插头
APPROVED(审核)	DATE(日期)	UNIT(单位)	MM	DWG NO.:
REVISIONS		MATERIAL (材料)		WEIGHT(重量) SHEET(表) REVISION(修订)
www.helloxkb.com www.helloxkb.cn		XKB INDUSTRIAL PRECISION CO.,LIMITED		1/1 A0