


| Main technical indicators(主要技术指标) |                                                                                                                    |
|-----------------------------------|--------------------------------------------------------------------------------------------------------------------|
| 1.Mating (插拔次数)                   | 5000                                                                                                               |
| 2.Working Temperature (温度)        | -55~+150 ℃                                                                                                         |
| 3.IP Rating (防护级别)                | IP 50                                                                                                              |
| 4.Diameter of socket end(插合端直径)   | φ0.7                                                                                                               |
| 5.Testing Voltage (测试电压)          | 1150V                                                                                                              |
| 6.Working Voltage (工作电压)          | 1350V                                                                                                              |
| 7.Rated Current (额定电流)            | 6.5A                                                                                                               |
| 8.Shell material(壳体材质)            | Brass (chromium plating) shell and chuck nut/( nickel plating) pin sleeve and middleware/黄铜(镀铬)外壳和夹头螺母/(镀镍)插销套和中间件 |
| 9.Pin Material(插针材料)              | Copper alloy gold plating(铜合金镀金)                                                                                   |
| 10.Insulator material(绝缘体材质)      | PPS                                                                                                                |


| Sum up(总结)                  |                                                                                       |
|-----------------------------|---------------------------------------------------------------------------------------|
| Series(系列)                  | B                                                                                     |
| Shell style/model (外壳样式/型号) | TGG: Straight plug, cable collet and nut for fitting a bend relief直塞、电缆夹头和螺母，用于安装弯曲凸起 |
| Button (按键)                 | A button(一个按键)                                                                        |
| Termination type (终止类型)     | Male solder(公焊锡)                                                                      |
| Line diameter awg(线材直径)     | 30-22AWG                                                                              |
| Cable diameterφ (电缆直径)      | φ4.3-5.2MM                                                                            |
| Matching parts(配件)          | ZGG.2B.P14.CLL                                                                        |

| Location pin combination (定位销组合) |                                          |               |                            |
|----------------------------------|------------------------------------------|---------------|----------------------------|
| (编号)<br>Nunder                   | Number of<br>positioning pins(定<br>位销数量) | Angle(<br>角度) | Series(系列)--2B             |
| G                                | One(1)                                   |               | (Zero degrees)0°           |
| A                                | Two(2)                                   | A             | Thirty degrees(30°)        |
| B                                | Two(2)                                   |               | Forty-five<br>degrees(45°) |
| C                                | Two(2)                                   |               | Sixty degrees(60°)         |
| D                                | Two(2)                                   | γ             | 95 degrees (95°)           |
| E                                | Two(2)                                   | β             | 120 degrees(120°)          |
| F                                | Two(2)                                   |               | 145 degrees(145°)          |
| J                                | Two(2)                                   | A             | 37.5degrees(37.5°)         |
| K                                | Two(2)                                   |               | 52.5degrees(52.5°)         |
| L                                | Two(2)                                   | γ             | Seventy degrees(70°)       |


|        | A      | B      | C√     | ANGLE   |       |
|--------|--------|--------|--------|---------|-------|
| 5-10   | ±0.02  | ±0.05  | ±0.1   | 0°-30°  | ±0.1° |
| 50-100 | ±0.1   | ±0.15  | ±0.2   | 61°-90° | ±0.5° |
| 50-100 | ±0.15  | ±0.2   | ±0.25  |         |       |
| 100-   | ±0.15% | ±0.20% | ±0.25% |         |       |

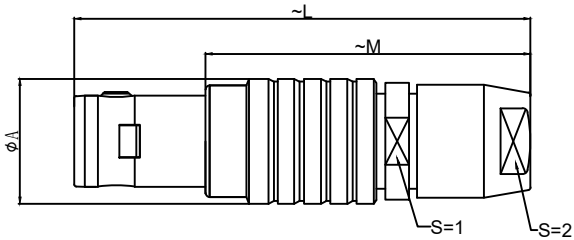


|    | A      | L      | M      | S1    | S2     |
|----|--------|--------|--------|-------|--------|
| MM | φ15    | 50     | 38     | 13.0  | 12     |
| in | 0.5906 | 1.9685 | 1.4960 | 0.512 | 0.4725 |



Welded surface  
(焊接面)



Positive view  
(正视图)



Solder core  
(焊接型公胶芯)

TG G. 2B. P14.C L A D 52

- Model(型号)
- Positioning pin(定位销)
- Series(系列)
- Needle core configuration(针芯配置)
- Outer casing(外壳)
- Insulator(绝缘体)
- Needle core(针芯)
- Type of clamp(线夹类型)
- Cable diameter(电缆直径)

|                                  |  |          |                                      |               |          |                                        |
|----------------------------------|--|----------|--------------------------------------|---------------|----------|----------------------------------------|
| DESIGNED (设计)                    |  | DATE(日期) |                                      | SCALE(比例)     | N/A(不适用) | MODEL TYPE<br>型号类型: TGG.2B.P14.CLAD52  |
| CHECKED (校对)                     |  | DATE(日期) |                                      | VIEW(视图)      |          | PART NO. 2B14-core plug<br>名称: 2B14芯插头 |
| APPROVED (审核)                    |  | DATE(日期) |                                      | UNIT(单位)      | MM       | DWG NO.:                               |
| REVISIONS                        |  |          |                                      | MATERIAL (材料) |          |                                        |
| www.helloxkb.com www.helloxkb.cn |  |          | XKB INDUSTRIAL PRECISION CO.,LIMITED |               |          | WEIGHT(重量) SHEET(表) REVISION(修订)       |
|                                  |  |          |                                      |               |          | 1/1 A0                                 |