

Main technical indicators(主要技术指标)					
1.Mating (插拔次数)	5000				
2.Working Temperature (温度)	-55~+150 ℃				
3.IP Rating (防护级别)	IP 50				
4.Diameter of socket end(插合端直径)	ø0.7MM				
5.Vtest (AC) /测试电压(交流)	1000V				
6.Vtest (DC) /测试电压(直流)	1500V				
7.Rated Current (额定电流)	7A				
8.Shell material(壳体材质)	Brass (chrome plated) shell and collet nut, nickel plated brass latch sleeve and mid pieces /黄铜（镀铬）外壳和夹头螺母，镀镍黄铜锁套和中间件				
9.Pin Material(插针材料)	Copper alloy gold plating(铜合金镀金)				
10.Insulator material(绝缘体材质)	PPS				


Sum up(总结)						
Series(系列)	B					
Shell style/model（外壳样式/型号）	ZCP: Fixed receptacle with two nuts, long threaded shell (back panel mounting)/带两个螺母的固定插座，长螺纹外壳（后面板安装）					
Button（按键）	Hermaphroditic keying (half moon insert) with female pin 1/雌雄同体键控（半月形插入），带母销1					
Termination type（终止类型）	Female print PCB(印刷PCB)					
Line diameter awg(线材直径)	32AWG-24AWG					
Cable diameterø（电缆直径）	-					
Match plug(匹配插头)	TFA.0S.P04.CLAD32					

Sum up(总结)					
Humidity (max)/湿度最大	<=95% [at 60 deg C /140 F] /<=95%[在60摄氏度/140摄氏度时]				
Vibration/震动	15g [10 Hz - 2000 Hz]				
Shock Resistance/抗冲击性	100 g [6 ms]				
Climatical Category /气候类别	50/175/21				
Salt Spray Corrosion/盐雾测试	>48 hr />48小时				


	A	B	C√	ANGLE	
5-10	±0.02	±0.05	±0.1	0°-30°	±0.1°
50-100	±0.1	±0.15	±0.2	61°-90°	±0.5°
50-100	±0.15	±0.2	±0.25		
100-	±0.15%	±0.20%	±0.25%		

DESIGNED (设计)		DATE(日期)		SCALE(比额)	N/A(不适用)
CHECKED (校对)		DATE(日期)		VIEW(视图)	
APPROVED (审核)		DATE(日期)		UNIT(单位)	MM
REVISIONS				MATERIAL（材料）	


www.helloxkb.com www.helloxkb.cn		XKB INDUSTRIAL PRECISION CO.,LIMITED		MODEL TYPE 型号类型: ZCP.0S.P04.CLN	
				PART NO. 0S4-core socket 名称: 0S4芯插座	
				DWG NO.:	
WEIGHT(重量)	SHEET(表)	REVISION(修订)			
	1/1	A0			

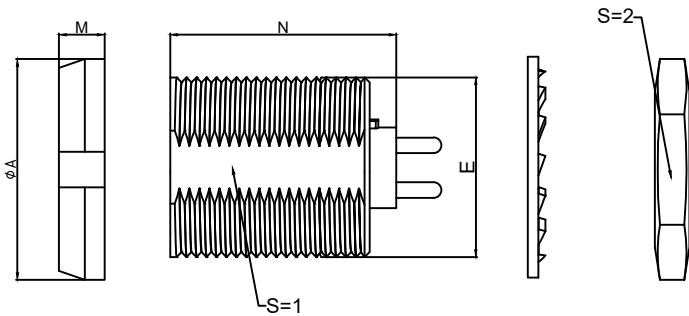

	A	N	E	M	S1	S2
MM	ø12	15.0	M9*0.6	2.5	8.2	11
in	ø0.47	0.59		0.1	0.32	0.43



Pane hole size
(面板开孔尺寸)



Pcb plate opening size
(PCB板开孔尺寸)





Plate joint master rubber core
(板接型母胶芯)



Welded surface
(焊接面)

ZCP.0S.P04.C L N

Model(型号)

Series(系列)

Needle core configuration(针芯配置)

Outer casing(外壳)

Insulator(绝缘体)

Needle core(针芯)