


1.View and size(视图及尺寸)

| Main technical indicators(主要技术指标) |                                                                                                                           |
|-----------------------------------|---------------------------------------------------------------------------------------------------------------------------|
| 1.Mating (插拔次数)                   | 5000                                                                                                                      |
| 2.Working Temperature (温度)        | -55~+150 ℃                                                                                                                |
| 3.IP Rating (防护级别)                | IP 50                                                                                                                     |
| 4.Diameter of socket end(插合端直径)   | φ0.7mm                                                                                                                    |
| 5.Vtest (AC) /测试电压(交流)            | 1500V                                                                                                                     |
| 6.Vtest (DC) /测试电压(直流)            | 2100V                                                                                                                     |
| 7.Rated Current (额定电流)            | 7A                                                                                                                        |
| 8.Shell material(壳体材质)            | Brass (chrome plated ) shell and collet nut, nickel plated brass latch sleeve and mid pieces /黄铜 (镀铬) 外壳和夹头螺母, 镀镍黄铜锁套和中间件 |
| 9.Pin Material(插针材料)              | Copper alloy gold plating(铜合金镀金)                                                                                          |
| 10.Insulator material(绝缘体材质)      | PPS                                                                                                                       |


| Sum up(总结)                  |                                                                                 |
|-----------------------------|---------------------------------------------------------------------------------|
| Series(系列)                  | B                                                                               |
| Shell style/model (外壳样式/型号) | ZRD: Fixed receptacle with two nuts (back panel mounting)/带两个螺母的固定插座 (背板安装)     |
| Button (按键)                 | Hermaphroditic keying (half moon insert) with female pin 1/雌雄同体键控 (半月形插入), 带母销1 |
| Termination type (终止类型)     | Mother solder tin(母焊锡)                                                          |
| Line diameter awg(线材直径)     | 32AWG-24AWG                                                                     |
| Cable diameterφ (电缆直径)      | φ1.2-8.5MM                                                                      |
| Match plug(匹配插头)            | TFA.1S.P06.CLAD32                                                               |

| Sum up(总结)                |                                                      |
|---------------------------|------------------------------------------------------|
| Humidity (max)/湿度最大       | <=95% [at 60 deg C /140 F]<br>/<=95%[在60摄氏度/140摄氏度时] |
| Vibration/震动              | 15g [10 Hz - 2000 Hz]                                |
| Shock Resistance/抗冲击性     | 100 g [ 6 ms]                                        |
| Climatical Category /气候类别 | 50/175/21                                            |
| Salt Spray Corrosion/盐雾测试 | >48 hr/>48小时                                         |


|        | A      | B      | C√     | ANGLE   |       |
|--------|--------|--------|--------|---------|-------|
| 5-10   | ±0.02  | ±0.05  | ±0.1   | 0°-30°  | ±0.1° |
| 50-100 | ±0.1   | ±0.15  | ±0.2   | 61°-90° | ±0.5° |
| 50-100 | ±0.15  | ±0.2   | ±0.25  |         |       |
| 100-   | ±0.15% | ±0.20% | ±0.25% |         |       |

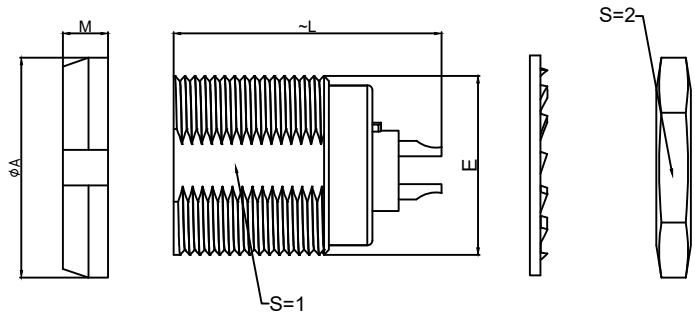


|    | A     | L    | E     | M    | S1   | S2   |
|----|-------|------|-------|------|------|------|
| MM | φ16   | 20.2 | M12*1 | 3.5  | 10.5 | 14   |
| in | φ0.63 | 0.80 |       | 0.14 | 0.41 | 0.55 |



Pane hole size  
(面板开孔尺寸)



Welded master rubber core  
(焊接型母胶芯)



Welded surface  
(焊接面)

ZRD.1S.P06.C L L

Model(型号)

Series(系列)

Needle core configuration(针芯配置)

Outer casing(外壳)

Insulator(绝缘体)

Needle core(针芯)

|                                  |  |          |                                      |               |          |                                            |
|----------------------------------|--|----------|--------------------------------------|---------------|----------|--------------------------------------------|
| DESIGNED(设计)                     |  | DATE(日期) |                                      | SCALE(比例)     | N/A(不适用) | MODEL TYPE<br>型号类型: ZRD.1S.P06.CLL         |
| CHECKED(校对)                      |  | DATE(日期) |                                      | VIEW(视图)      |          | PART NO. 1S6-core socket<br>名称: 1S6芯插座     |
| APPROVED(审核)                     |  | DATE(日期) |                                      | UNIT(单位)      | MM       | DWG NO.:                                   |
| REVISIONS                        |  |          |                                      | MATERIAL (材料) |          |                                            |
| www.helloxkb.com www.helloxkb.cn |  |          | XKB INDUSTRIAL PRECISION CO.,LIMITED |               |          | WEIGHT(重量) SHEET(表) REVISION(修订)<br>1/1 A0 |